


# Ampacoll® XT

Acrylic adhesive tape for indoor and outdoor use

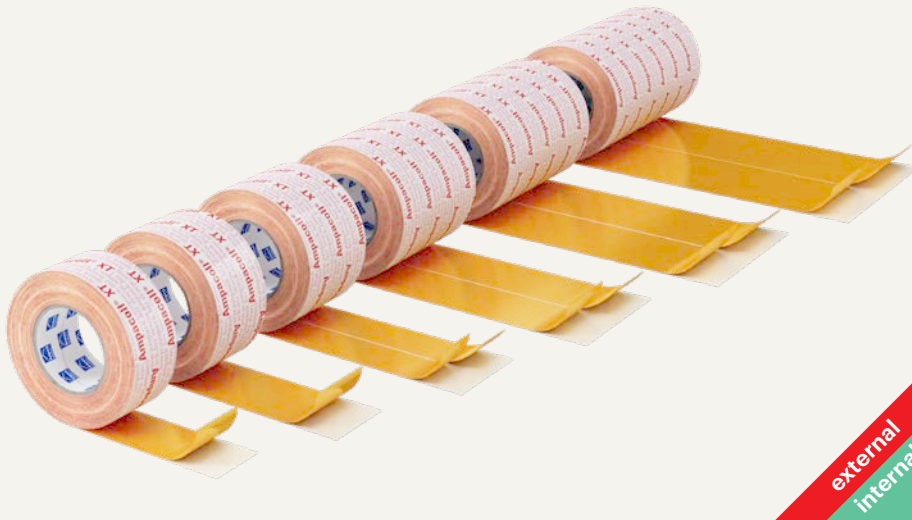

- > Diffusion-permeable carriers
- > Keeps its shape thanks to tear-resistant carrier
- > Maximum adhesive power at temperatures from as low as  $-5^{\circ}\text{C}$
- > Extremely robust and durable
- > Tyvek®-carrier is watertight and will not rot

Technical details	Value	Standard
Storage	Cool and dry	
Application temperature	from $-5^{\circ}\text{C}$	
Temperature resistance	$-40$ to $+100^{\circ}\text{C}$	
Resistance to ageing	$>20$ years	
Natural weathering period	4 months (without mechanical stress)	



 **ISO 9001**  
Swiss Research

**Area of application:** Tear-resistant system adhesive tape for indoor and outdoor use. Depending on the width, the adhesive band is ideal for wind and airtight adhesion of board joints, overlaps, end winding and right-angle connections, component joints, injection holes, repair sites, thresholds and for adhesion to ridges, hips and grooves.

Delivery forms			
Item no.	Identification	Roll size	Box contents
7640115531728	Ampacoll® XT 60	25m×60mm×0.3mm	10 rolls = 250 metres
7640115531759	Ampacoll® XT 75	25m×75mm×0.3mm	6 rolls = 150 metres
7640115531780	Ampacoll® XT 100 single-slit	25m×100mm×0.3mm Slit: 50mm	4 rolls = 100 metres
7640115531810	Ampacoll® XT 150 single-slit	25m×150mm×0.3mm Slit: 75mm	4 rolls = 100 metres
7640115535245	Ampacoll® XT 200 single-slit	25m×200mm×0.3mm Slit: 100mm	2 rolls = 50 metres
7640115535948	Ampacoll® XT 250 single-slit	25m×250mm×0.3mm Slit: 125mm	2 rolls = 50 metres

## Application photos



## Application tips

Surfaces must be clean, dry and free of dust, ice and grease prior to adhesion. **Ampacoll® XT** is ideally suited for airtight and windproof adhesion of overlaps and board joints, formasking end winding and right-angle connections in wood-based boards, for bridging larger and smaller components, masking boards on ridges, hips and grooves, and for masking injection holes, thresholds and repair sites.

**Ampacoll® XT** adheres immediately to the surface it is intended for. It can largely withstand normal weather conditions for four months. Please ensure that once they have been masked with the tape, the joints are not damaged mechanically (e.g. by objects being dragged across them).



Please observe the recommendations for use and further system products in our adhesives matrix



Further information and detailed documentation at [www.ampack.biz](http://www.ampack.biz)

Sales via specialist dealers

Ampack Switzerland: 071 858 38 00  
Ampack Austria: 05523 53433  
Ampack Germany: 07621 1610264  
Ampack France: 04 50 83 70 54  
Ampack Italy: 0471 053 475

[www.ampack.biz](http://www.ampack.biz)



The following information may have been superseded by new findings or developments. Current information can be found at [www.ampack.biz](http://www.ampack.biz). © Ampack AG, Rorschach, 05.2018

5001EU/D25.00HW(VS)0418